




Ø	BH Bauhöhe Height		MOA Vorneigung Inclination	F		Hebel / Best-Nr. Lever / Part #	Gewicht Weight		Mutter / Best-Nr. Nut / Part #	Gewicht Weight	
	mm	inch		mm	inch		g	oz		g	oz
30mm	20	.79	0-70 MOA	7.0	.28	T4063-0020	371	13.09	T5063-0020	345	12.17
	25	.98	0-70 MOA	7.0	.28	T4063-0025	402	14.18	T5063-0025	376	13.26
34mm	20	.79	0-70 MOA	7.0	.28	T4064-0020	376	13.26	T5064-0020	351	12.38
	25	.98	0-70 MOA	8.0	.32	T4064-0025	405	14.29	T5064-0025	379	13.37
	30	1.18	0-70 MOA	12.0	.47	T4064-0030	430	15.17	T5064-0030	404	14.25
36mm	22	.87	0-70 MOA	7.0	.28	T4066-0022	388	13.69	T5066-0022	362	12.77
Einteilung in MIL/mrad Setting in MIL/mrad											
30mm	20	.79	0-20 mrad	7.0	.28	T4073-0020	371	13.09	T5073-0020	345	12.17
	25	.98	0-20 mrad	7.0	.28	T4073-0025	402	14.18	T5073-0025	376	13.26
34mm	20	.79	0-20 mrad	7.0	.28	T4074-0020	376	13.26	T5074-0020	351	12.38
	25	.98	0-20 mrad	8.0	.32	T4074-0025	405	14.29	T5074-0025	379	13.37
	30	1.18	0-20 mrad	12.0	.47	T4074-0030	430	15.17	T5074-0030	404	14.25
36mm	22	.87	0-20 mrad	7.0	.28	T4076-0022	388	13.69	T5076-0022	362	12.77

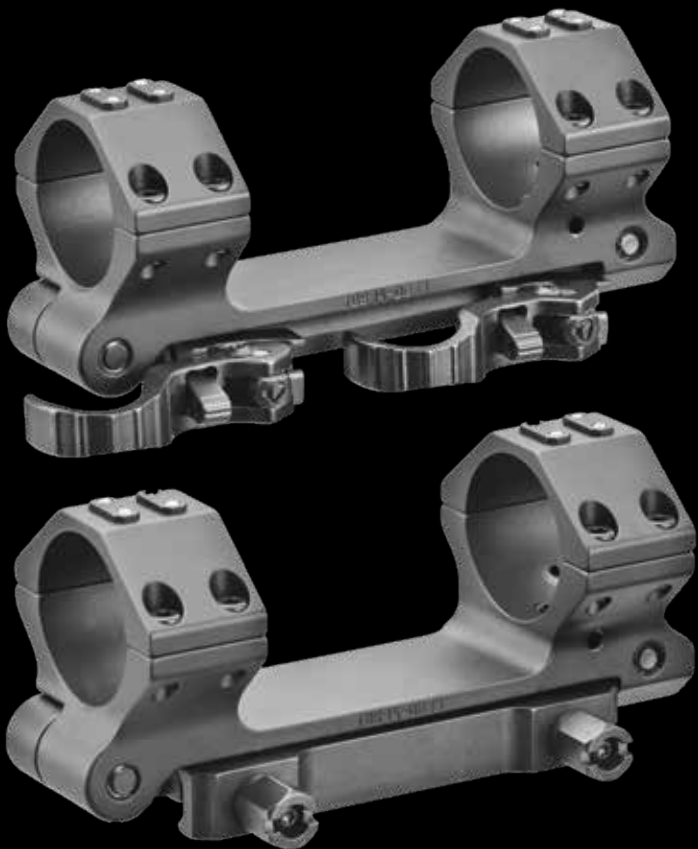